




RECIPROCATING BLADE SPECIFICATION FORM

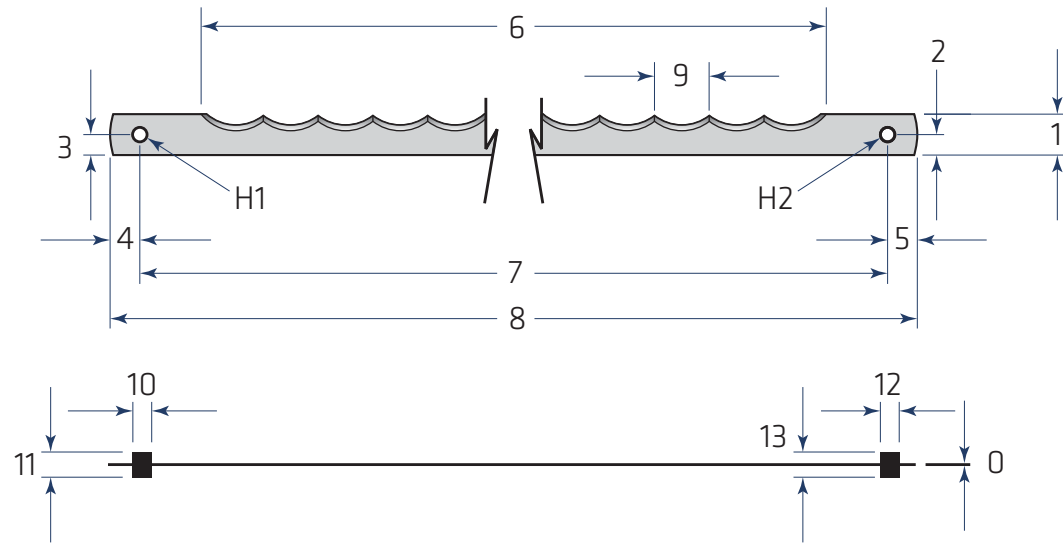

Slicer Make and Model _____

Item	Description	Dimension	Tolerance
0	Thickness of Blade		
1	Width of Blade		
2	Distance from Center of Hole H2 to back edge		
3	Distance from Center of Hole H1 to back edge		
4	Distance from Center of Hole H1 to blade end		
5	Distance from Center of Hole H2 to blade end		
6	Length of Scalloped (sharpened) area		
7	Distance between Center of H1 and Center of H2		
8	Length of Blade from end to end		
9	Pitch of scallop points (distance from tip to tip)		
10	Diameter of H1 Rivet or Pin		
11	Length of H1 Rivet or Pin		
12	Diameter of H2 Rivet or Pin		
13	Length of H2 Rivet or Pin		
H1	Diameter of Hole 1		
H2	Diameter of Hole 2		
	Type of Steel or Blade		
	Type of Rivets or Pins		

All Measurements are in INCHES

All Measurements are in MILLIMETERS



WORLD'S LEADER
IN BREAD SLICING



WORLD'S LEADER
IN BREAD SLICING

RECIPROCATING
BLADES



Phone: 563-386-1131 • 800-553-4992
 Fax: 563-386-7707
 820 West 35th Street
 Davenport, IA 52806
 www.hansaloy.com • sales@hansaloy.com



RECIPROCATING BLADES

Hansaloy provides slicing blades for practically all reciprocating slicer models worldwide.

Each blade edge is designed with consideration for the type of crust, texture, and grain of the breads being sliced.

Hansaloy grinding and edge finishing capability set the standard for blade sharpness and edge life.

TYPICAL MOUNTING ENDS

Available: Teflon® Coating and Stainless Steel

*Teflon® is a registered trademark of DuPont



SLICER CHART

Machine	C-C Length	Width	Thickness	Available Pitches	Left End	Right End	
Berkel	264 mm	9.5 mm	0.41 mm	12.7 mm	4.8 mm PIN	Threaded Fitting	
	10.375 in	0.375 in	0.016 in	1/2"	1.88" PIN		
Daub	258 mm	9.5 mm	0.46 mm	12.7 mm	6.4 mm	5.3 mm PIN	5.3 mm PIN
	10.157 in	0.375 in	0.018 in	1/2"	1/4"	.209" PIN	.209" PIN
	297 mm	9.5 mm	0.46 mm	12.7 mm	6.4 mm	5.3 mm PIN	5.3 mm PIN
	11.693 in	0.375 in	0.018 in	1/2"	1/4"	.209" PIN	.209" PIN
Hartman	291 mm	12.7 mm	0.41 mm	12.7 mm	6.4 mm	30 deg. SLOT	4.8 mm RIVET
	11.438 in	0.500 in	0.016 in	1/2"	1/4"		.188 RIVET
	291 mm	9.5 mm	0.41 mm	12.7 mm	6.4 mm	30 deg. SLOT	4.8 mm RIVET
	11.438 in	0.375 in	0.016 in	1/2"	1/4"		.188 RIVET
Heristal	258 mm	9.5 mm	0.46 mm	12.7 mm	6.4 mm	5.5 mm HOLE	5.5 mm HOLE
	10.158 in	0.375 in	0.018 in	1/2"	1/4"	.216" HOLE	.216" HOLE
JAC	270 mm	9.5 mm	0.41 mm	12.7 mm	6.4 mm	2.9 mm PIN	2.9 mm PIN
	10.630 in	0.375 in	0.016 in	1/2"	1/4"	.112" PIN	.112" PIN
National / Dowson	358.4 mm	11.1 mm	0.3 mm	12.7 mm	6.4 mm	6.35 mm PIN	6.35 mm PIN
	14.110 in	0.437 in	0.012 in	1/2"	1/4"	.250" PIN	.250" PIN
Oliver <small>Hardened Edged</small>	260 mm	9.5 mm	0.41 mm	12.7 mm	6.4 mm	4.0 mm HOLE	4.0 mm HOLE
	10.25 in	0.375 in	0.016 in	1/2"	1/4"	.156" HOLE	.156" HOLE
	260 mm	11.1 mm	0.41 mm	12.7 mm		4.0 mm HOLE	4.0 mm HOLE
	10.25 in	0.437 in	0.016 in	1/2"		.156" HOLE	.156" HOLE
Renove	261 mm	9.5 mm	0.46 mm	12.7 mm		3.4 mm HOLE	3.4 mm HOLE
	10.276 in	0.375 in	0.018 in	1/2"		.135" HOLE	.135" HOLE
VLB	259.5 mm	9.5 mm	0.46 mm	12.7 mm	6.4 mm	4.5 mm HOLE	4.5 mm HOLE
	10.217 in	0.375 in	0.018 in	1/2"	1/4"	.177" HOLE	.177" HOLE
Wabama	285 mm	9.5 mm	0.46 mm	12.7 mm	6.4 mm	2.9 mm PIN	2.9 mm PIN
	11.220 in	0.375 in	0.018 in	1/2"	1/4"	.112" PIN	.112" PIN

PITCH



1/2" / 12.7mm pitch



1/4" / 6.4mm pitch

WORLD'S LEADER
IN BREAD SLICING



HANSALOY®